


## > GY SERIES

### 精密級固定頂針

#### PRECISION DEAD CENTER

- ◎ 頂尖主體材料為低淬透性滲碳鋼，經滲碳淬火處理，硬度HRC58-62  
The center body hardness can meet HRC58-62
- ◎ 頂尖軸頭部鑲嵌優質鎢鋼，硬度HRA89  
The center head with carbide tip which hardness can meet HRA 89
- ◎ 適用於高精密軸心研磨加工  
It's applicable for high precision shaft grinding process

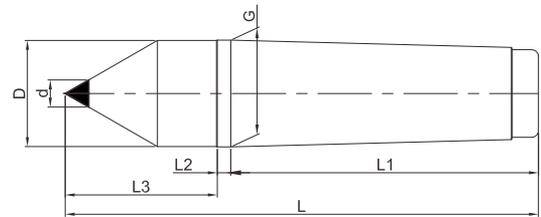

規格 / Specification 單位/UNIT: mm


型式/外表尺寸 Model/Spec	d	D	L	L1	L2	L3	G	精度(mm)
GY-3	10	23.6	125	82	6	37	23.825(MT3)	0.003
GY-4	15	31	160	105	6.5	48.5	31.267(MT4)	0.003
GY-5	18	44.5	205	132	6.5	66.5	44.399(MT5)	0.003
GY-6	30	63.8	275	182	8	82	63.348(MT6)	0.005

## > GR SERIES

### 精密級固定頂針(半邊式)

#### PRECISION DEAD CENTER(HALF TYPE)

- ◎ 頂尖主體材料為低淬透性滲碳鋼，經滲碳淬火處理，硬度HRC58-62  
The center body hardness can meet HRC58-62
- ◎ 頂尖軸頭部鑲嵌優質鎢鋼，硬度HRA89  
The center head with carbide tip which hardness can meet HRA 89
- ◎ 適用於高精密軸心研磨加工  
It's applicable for high precision shaft grinding process

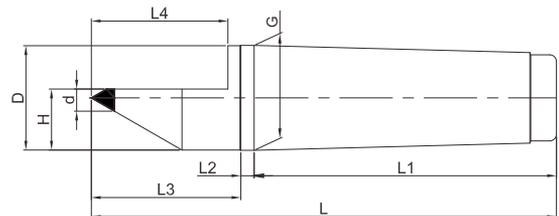

規格 / Specification 單位/UNIT: mm

型式/外表尺寸 Model/Spec	d	D	H	L	L1	L2	L3	L4	G	精度(mm)
GR-3	10	23.6	15	125	82	6	37	36	23.825(MT3)	0.003
GR-4	15	31	20.5	160	105	6.5	48.5	48	31.267(MT4)	0.003
GR-5	18	44.5	29.2	205	132	6.5	66.5	63	44.399(MT5)	0.003