



IAC系列标准分度卡盘

IAC SERIES STANDARD INDEXING CHUCK

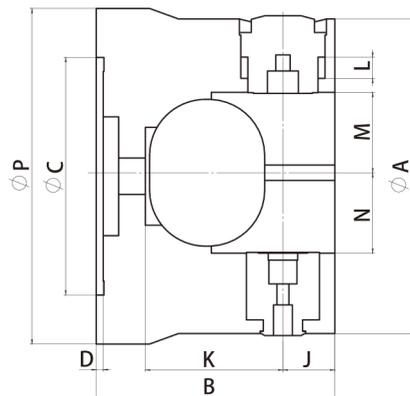

产品优势 / PRODUCT ADVANTAGES

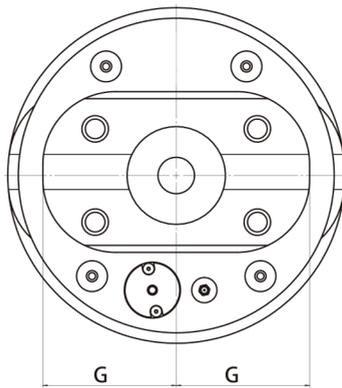

多面加工

同一本体一次装夹实现8×45°或6×60°多个面加工



快速换模

插拨式夹具固定方案，1分钟内实现夹具更换



高精度

角度分度精度<1'，重复定位<0.01mm



角度定制

非标角度可以定制，咨询我们的销售或服务热线



浮动靠山

叠加专利技术浮动靠山，定位时伸出，转位时缩回

产品尺寸表

型号/尺寸	A mm	B mm	C mm	D mm	G mm	J mm	K mm	M mm	N mm	P mm
IAC-168A/C	168	142	140	3.5	68	35	70	37.9	37.5	190
IAC-203A/C	203	158	140	5	82	36	82	48.3	43.5	216
IAC-225A/C	225	170	170	5	95	37	95	59.3	54.5	240
IAC-256A/C	256	187	220	5	105	42	105	61.5	60	276
IAC-305A/C	305	212	220	5	130	45	130	86	84.5	330
IAC-400A/C	400	278	300	8	175	58	175	118.8	114.5	416
IAC-460A/C	460	308	300	8	205	58	205	137	133	490

型号/规格	最大加工尺寸 mm	夹紧力 KN	夹持行程 mm	最高转速 r.p.m	主轴鼻头 No	主轴通孔 mm	净重 kg
IAC-168A/C	136	10.6	9	3500	A2-5	45	15
IAC-203A/C	164	11.3	15.2	3000	A2-5	45	24
IAC-225A/C	190	11.3	15.2	2800	A2-6	45	30
IAC-256A/C	210	14.5	19.1	2500	A2-8	45	42
IAC-305A/C	260	14.5	19.1	2200	A2-8	45	61
IAC-400A/C	350	31.4	30	1800	A2-11	45	120
IAC-460A/C	410	31.4	30	1500	A2-11	45	161